


8.5 cm



12 cm

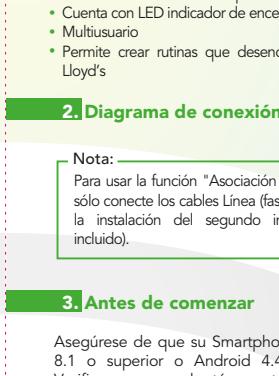

LLOYD'S® Interruptor

Marca: Lloyd's Modelo: LC-1202

Lloyd's® te ayuda a hacer tu casa inteligente


Toma el control desde una sola App y convierte tus espacios en lugares seguros, eficientes, cómodos y divertidos.

1. Características

- Dispositivo controlable remotamente desde cualquier lugar a través de la App
- No requiere HUB
- Compatible con asistentes virtuales de Google y Alexa
- Encienda y apague la luz de forma manual, desde la App o por comandos de voz
- Ahorro de energía: Programe diferentes horarios de encendido y apagado para un control óptimo de la iluminación
- Personalice el estado que desea para el dispositivo en caso de corte y restauración de suministro de energía
- Uso de Bluetooth para una configuración rápida
- La función "Asociación multi-control" le permite asociar cada interruptor de este interruptor con un interruptor de otro interruptor inteligente desde la App
- Pantalla táctil con vidrio templado
- Cuenta con LED indicador de encendido y apagado
- Multusuário
- Permite crear rutinas que desencadenan acciones en otros productos inteligentes Lloyd's

2. Diagrama de conexión

Nota:
Para usar la función "Asociación multi-control", sólo conecte los cables Línea (fase) y Neutro en la instalación del segundo interruptor (no incluido).

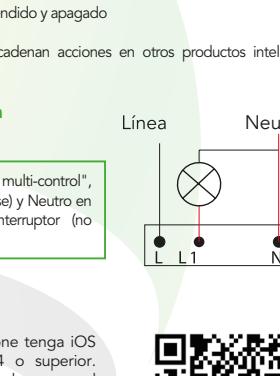

3. Antes de comenzar

Asegúrese de que su Smartphone tenga iOS 8.1 o superior o Android 4.4 o superior. Verifique que su red esté conectada a un canal Wi Fi de 2.4 GHz

Descargue la App Lloyds Smart desde App Store o Play Store o escanee el siguiente código QR con su Smartphone.

GUÍA RÁPIDA DE INSTALACIÓN

FAVOR DE LEER LA PRESENTE GUÍA DE INSTALACIÓN ANTES DE OPERAR SU PRODUCTO

"La operación de este equipo está sujeta a las siguientes dos condiciones: (1) es posible que este equipo o dispositivo no cause interferencia perjudicial y (2) este equipo o dispositivo debe aceptar cualquier interferencia, incluyendo la que pueda causar su operación no deseada".

4. Registro y acceso

Inicie la App Lloyds Smart. Para registrarse, haga clic en "Crear cuenta nueva" (1), para continuar haga clic en "De acuerdo", elija su país e ingrese una dirección de correo electrónico, luego haga clic en "Obtenga el código de verificación" (2).



5. Añadir dispositivo

Después de instalar el interruptor, presione por más de 20 segundos el botón, hasta que la luz indicadora parpadee rápidamente, lo cual significará que el dispositivo puede ser configurado a su red Wi Fi y añadido a la App (1). Abra la App Lloyds Smart, seleccione "+" en la esquina superior derecha (2). Elija el tipo de dispositivo que desea añadir, en este caso seleccione "Energía" (3), luego haga clic en "Interruptor de luz inteligente" (4).



Nota:
El nombre que se asigne al dispositivo es el que utilizará para hacer funcionar los comandos de voz de Google o Alexa.

6. Control del dispositivo

Una vez terminada la configuración, busque y seleccione el interruptor en la lista de dispositivos (9).



7. Cómo conectar con Google Home

4. Haga clic en "Detectar dispositivos" para encontrar los dispositivos inteligentes. Ahora ya puede solicitar a su asistente controlarlos mediante comandos de voz.

Nota:
Asegúrese de que la contraseña Wi Fi que ingrese sea la correcta y de que el dispositivo esté cerca del módem durante el proceso.

8. Cómo conectar con Amazon Alexa


4. Descargue e ingrese a la App "Google Home", previamente configurada con su cuenta de correo electrónico Gmail y su asistente virtual.

Nota:
Si lo desea, puede renombrar los dispositivos desde Lloyds Smart para controlarlos con comandos de voz. Cada vez que renombre los dispositivos, solicite a su asistente lo siguiente: "Alexa, sincroniza dispositivos" o actualice desde la App Amazon Alexa.

9. Especificaciones eléctricas

100 - 240 V ~ 50/60 Hz 15 A

Este dispositivo es compatible con las siguientes Apps:

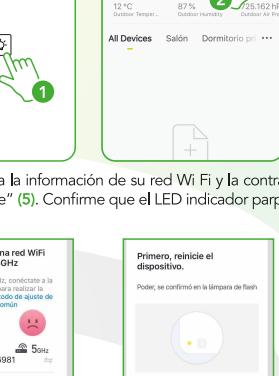

Importado por:
ZUTTO TECHNOLOGIES, S. A. DE C. V.
R.F.C.: ZTE161017KT6
Av. Ejército Nacional
No. 505 Interior 1602,
Col. Granada, C.P. 11520
Miguel Hidalgo
Ciudad de México, México.
Tels.: 55 6844 7575 / 800 2345693

8.5 cm

12 cm

1

LLOYD'S®

Switch

Brand: Lloyd's

Model: LC-1202

Lloyd's® helps you make your home a smart home

Take control from one single App and transform your spaces into safe, efficient, comfortable and fun places.

QUICK GUIDE

PLEASE READ THE INSTALLATION GUIDE BEFORE OPERATING THE PRODUCT

Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

1. Features

- Remotely controllable device from anywhere through the App
- No HUB required
- Compatible with Google and Alexa virtual assistants
- Turn the light on and off manually, from the App or by voice commands
- Energy-saving: create different on/off schedules for optimal lighting control
- Customize the desired state for the device in the event of a power failure and power restoration
- Use of Bluetooth for quick configuration
- The "Multi-Control association" function allows you to link each gang of this switch with a gang of another smart switch from the App
- Tempered glass touch screen
- Power indicator LED
- Multi-user
- It allows you to create routines that trigger actions on other Lloyd's smart products

2. Connection diagram

Note: To use the "Multi-Control Association" function, only connect the Line (phase) and Neutral wires in the second switch installation (not included).

3. Before getting started

Make sure your Smartphone has iOS 8.1 or higher or Android 4.4 or higher. Check your network and make sure you are connected to a 2.4 GHz Wi-Fi channel.

Download the App Lloyds Smart from App Store or Play Store or scan the following QR code with your Smartphone.

4. Registration and access

Run the App Lloyds Smart. To register, click on "Sign Up" (1), click "Agree", choose your country and enter your email address, click "Get Verification Code" (2).

5. Add device

Once the device is configured, you can change the name (7), finally click on "Done" (8).

NOTE: The name that you assign to the device will be the one that you use for voice commands with Google and Amazon Alexa assistants.

6. Device control

Once the configuration is completed, select the Smart Light Switch from the list (9).

7. How to connect to Google Home?

NOTE: Make sure the Wi-Fi password you enter is correct and that the device is close to the modem during the process.

1. Download and launch the "Google Home" App, previously configured with your Gmail account and your virtual assistant.
2. Click on the option "Skills & games", then in the search bar type Lloyds Smart. When you get the icon, click on it. Then press the "Activate to use" button.
3. Enter your Lloyds Smart account and click on "Link Now" and finally "Authorize". You will get the message "Linked successfully", click on "Close" and wait a few seconds.
4. Click "Detect devices" to find the smart devices. Now you can ask your assistant to control them by voice commands.

NOTE: You can rename the devices from the Lloyds Smart App to control them with voice commands. Every time you rename the devices, say: "Alexa, sync devices" or update from the Amazon Alexa App.

8. How to connect to Amazon Alexa?

NOTE: The name that you assign to the device will be the one that you use for voice commands with Google and Amazon Alexa assistants.

1. Download and access the "Amazon Alexa" App, previously configured with your email account and your virtual assistant.
2. Click on the option "Skills & games", then in the search bar type Lloyds Smart. When you get the icon, click on it. Then press the "Activate to use" button.
3. Enter your Lloyds Smart account and click on "Link Now" and finally "Authorize". You will get the message "Linked successfully", click on "Close" and wait a few seconds.
4. Click "Discover devices" to find the smart devices. Now you can ask your assistant to control them by voice commands.

9. Electrical Specifications

100 - 240 V ~ 50/60 Hz 15 A

This device is compatible with the following Apps:

LLOYD'S®

Imported by:
ZUTTO TECHNOLOGIES, S.A. DE C.V.
R.F.C.: ZTE161017K6
Av. Ejército Nacional No. 505
Interior 1402, Col. Granada,
C.P. 11520 Miguel Hidalgo
Ciudad de México, Mexico
Phones: 55 6847575, 800 2345693